


Taper Lock® clamping bushes

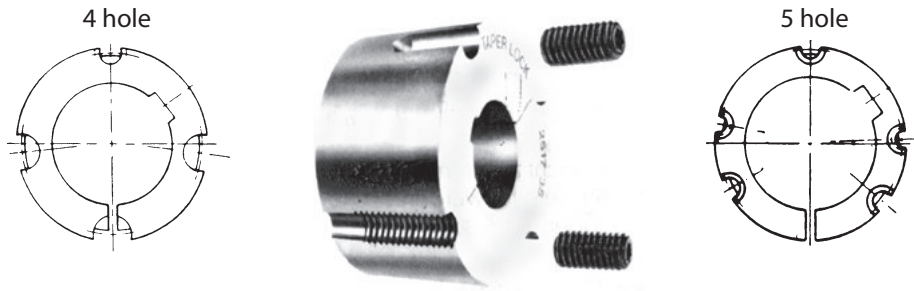

Bush no.	Bush bore mm	Keyway mm		Bush length mm	Approx. weight kg	Largest diameter mm
		wide	deep			
1008	10	3	1.4	22.3	0.15 to 0.08	35
	11 12	4	1.8			
	14 16	5	2.3			
	18 19 20 22	6	2.8			
	24 25	8	1.3*			
1108	10	3	1.4	22.3	0.18 to 0.10	38
	11 12	4	1.8			
	14 16	5	2.3			
	18 19 20 22	6	2.8			
	24 25	8	3.3			
	28	8	1.3*			
1210	11 12	4	1.8	25.4	0.17 to 0.30	47.5
	14 16	5	2.3			
	18 19 20 22	6	2.8			
	24 25 28 30	8	3.3			
	32	10	3.3			
1310	14 16	5	2.3	25.4	0.19 to 0.33	51
	18 19 20 22	6	2.8			
	24 25 28 30	8	3.3			
	32	10	3.3			
	35	10	1.3*			
1610	14 15 16	5	2.3	25.4	0.42 to 0.20	57
	18 19 20 22	6	2.8			
	24 25 28 30	8	3.3			
	32 35 38	10	3.3			
	40 42	12	3.3			
1615	14 16	5	2.3	38.1	0.60 to 0.25	57
	18 19 20 22	6	2.8			
	24 25 28 30	8	3.3			
	32 35 38	10	3.3			
	40 42	12	1.3*			
2012	14 16	5	2.3	31.8	0.80 to 0.38	70
	18 19 20 22	6	2.8			
	24 25 28 30	8	3.3			
	32 35 38	10	3.3			
	40 42	12	3.3			
	45 48 50	14	3.8			
2517	16	5	2.3	44.5	1.7 to 0.80	85.5
	18 19 20 22	6	2.8			
	24 25 28 30	8	3.3			
	32 35 38	10	3.3			
	40 42	12	3.3			
	45 48 50	14	3.8			
	55	16	4.3			
	60	18	4.4			
	3020	25 28 30	8			
32 35 38		10	3.3			
40 42		12	3.3			
45 48 50		14	3.8			
55		16	4.3			
60 65		18	4.3			
70 75		20	4.9			
3030		35 38	10	3.3	76.2	4.0 to 2.1
	40 42	12	3.3			
	45 48 50	14	3.8			
	55	16	4.3			
	60 65	18	4.4			
	70 75	20	4.9			

\* Bore with flat groove

Bush no.	Bush bore mm	Keyway mm		Bush length mm	Approx. weight kg	Largest diameter mm				
		wide	deep							
3525	35 38	10	3.3	64	5.5 to 1.8	127				
	40 42	12	3.3							
	45 48 50	14	3.8							
	55	16	4.3							
	60 65	18	4.4							
	70 75	20	4.9							
	80 85	22	5.4							
	90 95	25	5.4							
100	28	4.4*								
3535	35 38	10	3.3	88.9	6.6 to 3.2	127				
	40 42	12	3.3							
	45 48 50	14	3.8							
	55	16	4.3							
	60 65	18	4.4							
	70 75	20	4.9							
	80 85	22	5.4							
	90	25	5.4							
4030	40 42	12	3.3	76	7.4 to 4.2	146				
	45 48 50	14	3.8							
	55	16	4.3							
	60 65	18	4.4							
	70 75	20	4.9							
	80 85	22	5.4							
	90 95	25	5.4							
	100 105 110	28	6.4							
	115	32	5.4*							
	4040	40 42	12				3.3	101.6	10.1 to 5.2	146
45 48 50		14	3.8							
55		16	4.3							
60 65		18	4.4							
70 75		20	4.9							
80 85		22	5.4							
90 95		25	5.4							
100		28	6.4							
4535	55	16	4.3	89	10.7 to 4.2	162				
	60 65	18	4.4							
	70 75	20	4.9							
	80 85	22	5.4							
	90 95	25	5.4							
	100 105 110	28	6.4							
	115 120 125	32	7.4							
	4545	55	16				4.3	114.3	13.2 to 7.4	162
60 65		18	4.4							
70 75		20	4.9							
80 85		22	5.4							
90 95		25	5.4							
100 105 110		28	6.4							
5040		70 75	20	4.9	102	12.2 to 6.2	178			
		80 85	22	5.4						
	90 95	25	5.4							
	100 105 110	28	6.4							
	115 120 125	32	7.4							
5050	70 75	20	4.9	127	15.2 to 9.2	178				
	80 85	22	5.4							
	90 95	25	5.4							
	100 105 110	28	6.4							
	115 120 125	32	7.4							