



A Filtration Group Company

# JPM 2278-5-3

The JPM 2278-5-3 liquid filter cartridges have a range of efficiency, outside to inside flow direction elements specifically designed for the removal of solids contaminant in critical applications.

Jonell JPM's are available in various grades of high performance cellulose media with hardware customizable to suit your application.

## Performance


Micron Rating	5μ
Recommended Initial DP	< 2.0 psid
Recommended Change-Out DP	15 psid
Maximum Operating Temperature	275 °F
Flow Direction	Outside to In
Configuration	Double Open End

## Materials

<b>Media:</b>	Cellulose
<b>Core:</b>	Tinned Steel
<b>Outer Cover:</b>	Cotton
<b>End Caps:</b>	Tinned Steel
<b>Gaskets:</b>	Buna

*\*For Custom Engineered Products and Solutions... Consult Factory*

**Jonell**  
900 Industrial Pkwy P.O. Box 1092  
Breckenridge Texas 76424 USA  
Telephone: 254-559-7591  
Fax: 254-559-9863

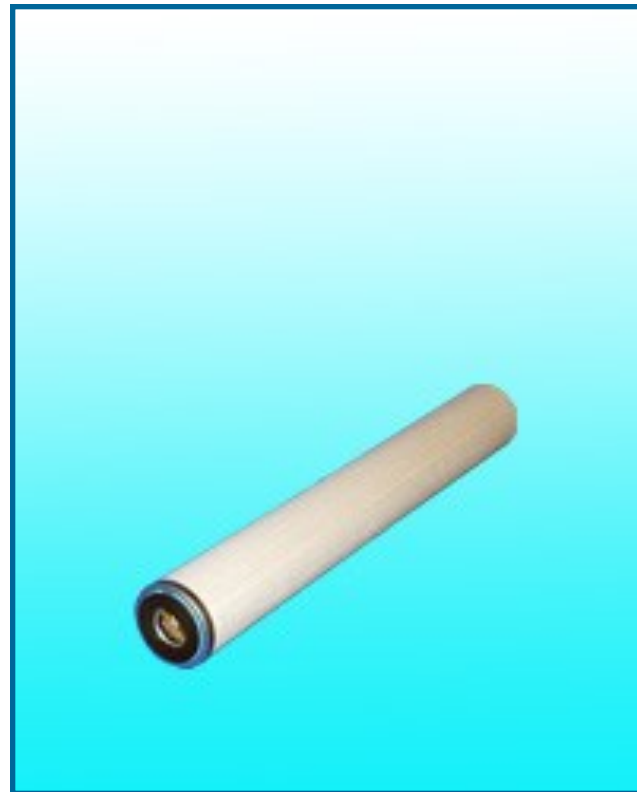

JPM 2278-5-3 Liquid Filter Cartridges

## Dimensions

Length	29.25 inches
Outside Diameter	2.62 inches
Inside Diameter	1.06 inches
Flow Pattern	Outside to In
Quantity	16 per box
Approx. Shipping Wt.	17 lbs. per box
Box Dimensions	10.5" x 10.5" x 30.5"

*\*Above dimensions are nominal in inches*

LIQUID FILTRATION

**Filtration Group**

Process Technologies Division



Visit us at [www.Jonellinc.com](http://www.Jonellinc.com)

For questions about filtration applications, replacement needs or help troubleshooting process and filtration issues contact an approved JONELL representative.

ISO 9001:2008