

[www.GESecurity.com](http://www.GESecurity.com)

## **S751DA**

*Two-Way Audio, Multiprotocol Data, and Contact Closure*

### **Overview**

---

The S751DA fiber links provide two-way transmission of audio, multiprotocol data, and contact closure over one or two multimode fibers.

### **Digital Processing**

---

Digital processing of the audio signal along with an audio signal-to-noise ratio >90 dB allows the audio output to drive balanced or unbalanced loads and maintain constant audio levels.

### **Data Translation**


---

The data functions include the unique data translation feature, which allows one data format to be input and a different data format to be output. Data formats are selected during installation and can be easily changed in the field via rotary switch.

### **Superior Diagnostics**

---

The SMARTS™ diagnostic technology provides an extensive set of built-in diagnostic tools including an audio test generator to verify audio channel operation. LEDs provide a visual indication of the operating status of the audio, data, and contact channels as well as the optical signal strength.

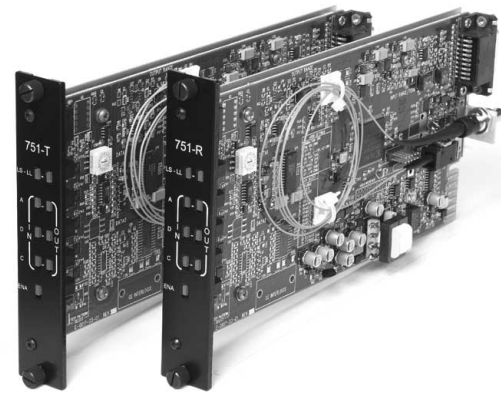

### **Standard Features**

---

- **Two-way audio, data and contact closure transmission over one or two multimode fibers**
- **24-bit audio processing**
- **Unique data translation function**
- **Local or remote user-selectable data format**
- **Supports multiprotocol data formats**
- **Relay/contact closure - 1 duplex channel**
- **Built-in audio test generator**
- **Diagnostic LEDs**



# S751DA

Two-Way Audio, Multiprotocol Data, and Contact Closure

## Specifications

### Audio

- Channels: 1 duplex
- Input Signal: 17.4 V p-p, +18 dBu max.
- Input Impedance: 600 ohms or 100k ohms
- Output Signal Level: 17.4 V p-p, +18 dBu max.
- Output Impedance: 30 ohms unbalanced, 60 ohms balanced
- Bandwidth: 20 Hz to 20 kHz
- Audio Sampling Rate: 52 kHz
- Signal-to-Noise Ratio: >90 dB
- Total Harmonic Distortion: <0.006%

### Data

- Channels: 1 duplex
- Formats: RS-232 (3-wire/5-wire), TTL, RS-422, RS-485 (2-wire/4-wire), Manchester, Biphase, SensorNet
- Baud Rate: 250 kbps to 512 kbps (depending on data format)
- Bit Error Rate: <1.0E-9
- Relay/Contact Closure: 1 duplex channel
- Relay/Contact Rating: 1 A at 30 VDC

### Optical

- Mode: Multimode
- Optical Budget: 13 dB
- Emitter: Laser
- Wavelength: 850 nm and/or 1300 nm (depending on model)
- Operating Distance: Up to 11 mi (18 km) (depending on model)
- Gain Control: Optical Automatic Gain Control (OAGC)

### Electrical

- Input Power: 13.5 VDC regulated
- Current Requirement: 500 mA
- Power Consumption: 6.75 W
- Power Factor: 4
- Protection: Solid-state short circuit protection
- Power Supply: Model 613P (optional)

### Environmental

- Operating Temperature: -40 to 167 °F (-40 to 75 °C)
- Maximum Humidity: 95% relative, noncondensing


### Standards

- Emissions: FCC Part 15, ICES-003, AS/NZS 3548, EN55022
- Immunity: ENV50130-4
- Safety: UL 1950, CAN/CSA 22.2, NO. 950-95
- Laser Safety: 21CFR1040, EN60825-1, -2

### Mechanical


- Dimensions: 1 slot (1.0")
- Weight: 0.7 lbs (0.32 kg)
- Construction: Aluminum

## Related Diagram

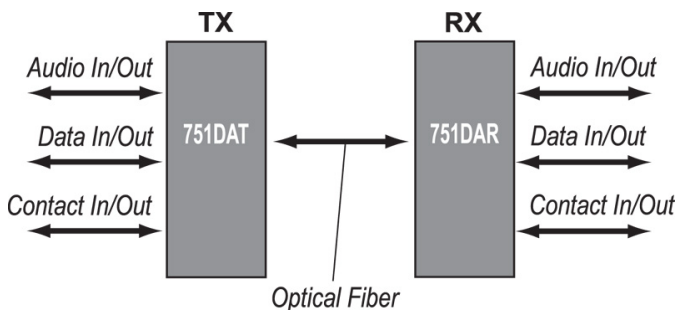

## Ordering Information

Use the Configurator below to select the options available for this product.

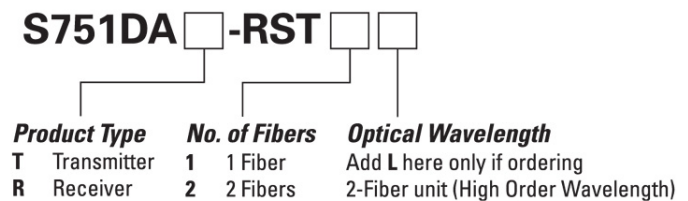

GE Security

Mailing Address  
4575 Research Way, STE 250  
Corvallis, OR 97333 USA  
www.GESecurity.com

Americas  
800-469-1676 (US only)  
tel 541-754-9133  
fax 541-754-7162

Asia  
tel 852-2907-8108  
fax 852-2142-5063

Australia  
tel +61-3-9676-0270  
fax +61-3-9646-7005

Europe  
tel +44-113-238-1668  
fax +44-113-253-8121

Latin America  
tel 305-267-4301  
fax 305-267-4300

www.GESecurity.com