




RF-U 2.5-2

H-Field Probe 30 MHz up to 3 GHz

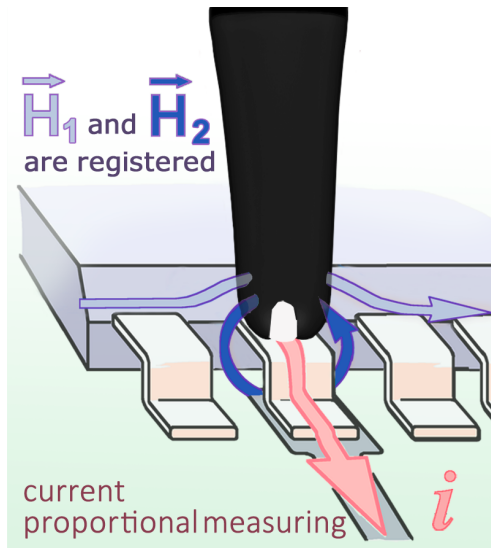


Short description

The RF-U 2.5-2 near-field probe is designed for the selective measurements of RF currents in conducting paths, component connectors, SMD components, and IC-pins. The probe head has a magnetically active gap with an approx. width of 0.5 mm. To use, the head should be positioned directly onto the measured object.

Technical parameter

Frequency range	30 MHz ... 3 GHz
Resolution	≈ 0.5 mm
Probe head dimensions	Ø ≈ 4 mm
Max. forward power	0,5 W
Connector - output	SMB, male, jack

Frequency response

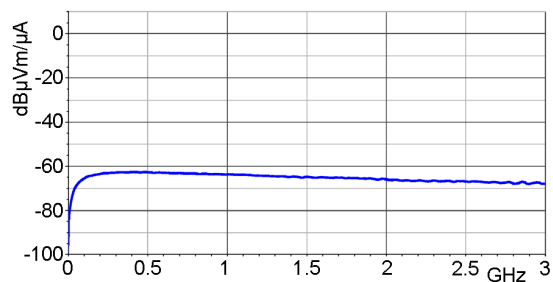

© Langer EMV-Technik, 07.04.2017