




### PRODUCT

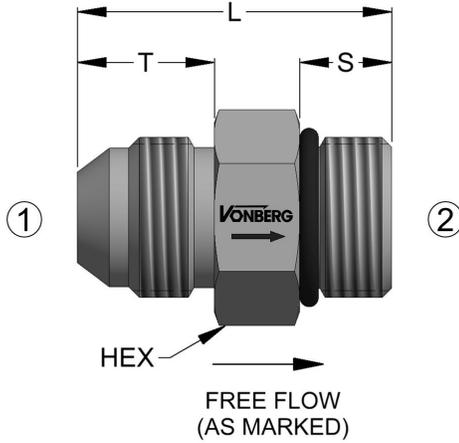

### SCHEMATIC

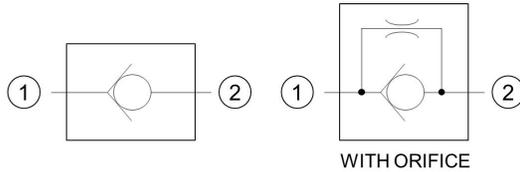

### TYPICAL PERFORMANCE

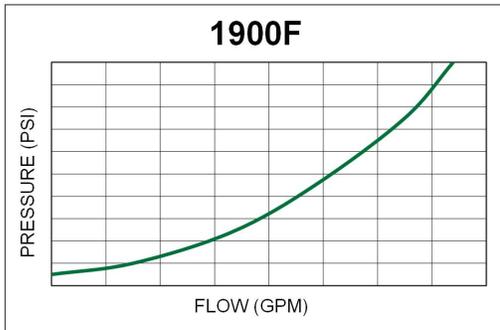

[Download Performance Curve Graphics](#)

### DESCRIPTION

AN IN-LINE STYLE CHECK VALVE INTENDED FOR BLOCKING FLUID FLOW.

### OPERATION

- FLOW FROM (2) TO (1) IS BLOCKED WITH A SPRING BIAS TO ASSIST IN STATIC AND LOW LOAD CONDITIONS.
- FLOW FROM (1) TO (2) IS ALLOWED WITH A STANDARD CRACK PRESSURE OF 3-5 PSI.


### FEATURES

- SPECIAL CRACK PRESSURES AVAILABLE UPON REQUEST.
- STEEL BODY AND POPPET.
- LOW INTERNAL LEAKAGE, 5 DPM.

### SPECIFICATIONS

OPERATING PRESSURE	3500 PSI
STANDARD CRACK PRESSURE	3-5 PSI
TEMPERATURE RANGE	250° F TO -40° F

### ORDERING INFORMATION

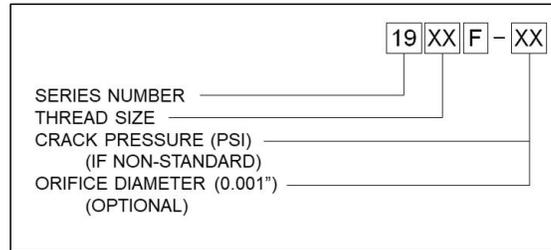

MODEL	INLET 1	OUTLET 2	THREAD	CAPACITY	L	T	S	HEX
1904F	-04 JIC	-04 SAE	7/16-20	2 GPM	1.23	0.540	0.360	0.562
1906F	-06 JIC	-06 SAE	9/16-18	4 GPM	1.45	0.540	0.390	0.750
1908F	-08 JIC	-08 SAE	3/4-16	8 GPM	1.47	0.655	0.440	0.875
1910F	-10 JIC	-10 SAE	7/8-14	12 GPM	1.62	0.760	0.500	1.000
1912F	-12 JIC	-12 SAE	1 1/16-12	30 GPM	2.00	0.860	0.594	1.250
1916F	-16 JIC	-16 SAE	1 5/16-12	40 GPM	2.27	0.910	0.594	1.500
1920F	-20 JIC	-20 SAE	1 5/8-12	50 GPM	2.75	0.960	0.594	1.875
1924F	-24 JIC	-24 SAE	1 7/8-12	80 GPM	3.50	1.080	0.594	2.125

This document, as well as all catalogs, price lists and information provided by Vonberg Valve, Inc., is intended to provide product information for further consideration by users having substantial technical expertise due to the variety of operating conditions and applications for these valves, the user, through its own analysis, testing and evaluation, is solely responsible for making the final selection of the products and ensuring that all safety, warning and performance requirements of the application or use are met. The valves described herein, including without limitation, all component features, specifications, designs, pricing and availability, are subject to change at any time at the sole discretion of Vonberg Valve, Inc. without prior notification.

Page last updated: 6/16/20, 11:49 PM